


Push button latches stainless steel

Item description/product images

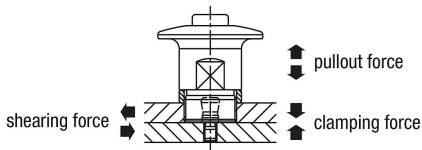

Description

Product description:

Push button latches are used for replacing and locking fixtures or hatches quickly and easily.
Toolless clamping shortens setup times.

Material:

Housing and push button stainless steel.

Version:

Housing and push button bright.

Note:

Form A for plate thickness 3 to 10 mm.
Form B for plate thickness 3 to 27 mm.

Type of operation:

Press the latch over the clamping pin without pressing the knob. The latch is now locked.
To release, press the button and pull the latch off.

Application:

Mounting option A in combination with spacer rings, for plate thickness 3 to 10 mm.
Mounting option B for plate thickness 10 to 27 mm.

Attention:

The specified pull-out forces apply only in combination with clamping pin K1564.


Accessory:

Spacer rings K1563.
Clamping pins K1564.

Drawing reference:

1) plate

Drawings

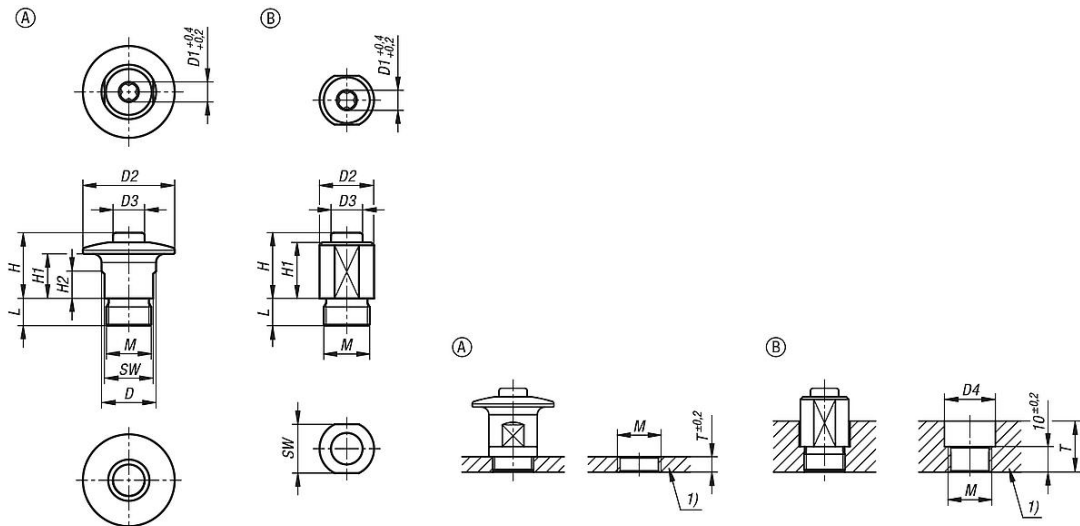

Push button latches stainless steel

Overview of items

Push button latches stainless steel

| Order No. | Form | Version 1 | D | D1 | D2 | D3 | D4 | H | H1 | H2 | L | M | SW | T | Clamping force N | Shearing force kN | Pullout force F kN | Temperature resistance |
|-----------|------|--------------|----|----|----|----|----|----|------|-----|-----|-------|----|-------|---------------------|----------------------|-----------------------|---------------------------|
| K1562.11 | A | with head | 19 | 6 | 32 | 11 | - | 23 | 15,5 | 8,5 | 9,5 | M16X1 | 17 | 3 | 6 | 1,1 | 0,25 | ≤180 °C |
| K1562.12 | B | without head | - | 6 | 19 | 11 | 20 | 23 | 19,5 | - | 9,5 | M16X1 | 17 | 10-27 | 6 | 1,1 | 0,25 | ≤180 °C |